

Product family datasheet

DECOSTAR 35

Halogen dichroic reflector lamps with 35 mm diameter



- General illumination Workplace lighting Kitchen lighting
Mirror lighting Object lighting Shops Restaurants, hotels
and similar prestigious applications

- Brilliant accent light Dichroic reflector reduces the heat in the light beam by up to 66 % Approved for use in open
luminaires (to IEC 60598-1) UV filter Contains no mercury




Product family datasheet

Technical data

Product description	Electrical data			Photometrical data			
	Nominal wattage	Nominal voltage	Rated wattage	Light color (designation)	Rated color temperature	Color rendering index Ra	Lumen main.fact.at end of nom.life time
DECOSTAR 35 10 W 12 V 36° GU4	10.00 W	12 V	10.00 W	Warm White	2800 K	100	0.75
DECOSTAR 35 20 W 12 V 36° GU4				Warm White			
Product description	Color temperature	Rated luminous flux	Nominal luminous flux	Light technical data		Dimensions & weight	
				Beam angle	Starting time	Diameter	Overall length
DECOSTAR 35 10 W 12 V 36° GU4	2800 K	90 lm	90 lm	36 °	0.0 s	35.0 mm	42.0 mm
DECOSTAR 35 20 W 12 V 36° GU4				36 °			40.00 mm
Product description	Outer bulb	Length	Product weight	Lifespan	Additional product data		Capabilities
				Number of switching cycles	Base (standard designation)	Mercury-free	Dimmable
DECOSTAR 35 10 W 12 V 36° GU4	T9	40.0 mm	15.70 g	100000	GU4	Yes	Yes
DECOSTAR 35 20 W 12 V 36° GU4			14.4 g			Yes	
Product description	Certificates & standards		Country specific categorizations	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)			
	Energy efficiency class	Energy consumption	Order reference	Date of Declaration	Primary Article Identifier	Declaration No. in SCIP database	
DECOSTAR 35 10 W 12 V 36° GU4	G	11 kWh/1000h	44888 WFL 10W 1	18-04-2022	4050300443935	In work	
DECOSTAR 35 20 W 12 V 36° GU4	G	22.00 kWh/1000h		01-07-2022	4050300346168 4008321165312	In work	

Product family datasheet

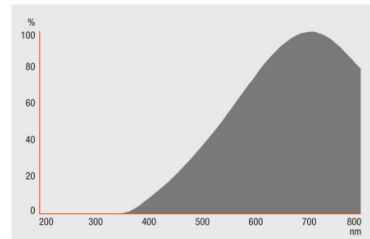

DECOSTAR 35 10 W 12 V 36° GU4,
DECOSTAR 35 20 W 12 V 36° GU4

DECOSTAR 35 10 W 12 V 36° GU4,
DECOSTAR 35 20 W 12 V 36° GU4

Application advice

For more detailed application information and graphics please see product datasheet.

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Product family datasheet

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300443935	DECOSTAR 35 10 W 12 V 36° GU4	Shipping carton box 10	178 mm x 69 mm x 72 mm	0.88 dm ³	227.40 g
4008321165312	DECOSTAR 35 20 W 12 V 36° GU4	Shipping carton box 100	179 mm x 143 mm x 256 mm	6.55 dm ³	2153.00 g
4050300346168	DECOSTAR 35 20 W 12 V 36° GU4	Shipping carton box 10	178 mm x 81 mm x 58 mm	0.84 dm ³	214.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For light distribution curves see
▶ www.osram.com

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany