


Product selected: Lynx-L 36W/840

Product Attributes	
Item description	Lynx-L 36W/840
Nominal wattage (W)	36
Rated Wattage (W) 50 Hz	-
Rated Wattage (W) HF	-
Bulb finish	840
Cap	2G11
Max. Overall Lamp length L [mm]	415
Diameter D [mm]	40
Mercury content per lamp (mg)	4.5
Colour rendering Index - CRI (class / %)	1B/85
Colour temperature (K)	4000
Nominal luminous flux at 25°C (lm)	-
Nominal luminous flux at 35°C (lm)	-
Lumen maintenance min. 2000 h (50 Hz)	0.96
Lumen maintenance min. 4000 h (50 Hz)	0.93
Lumen maintenance min. 6000 h (50 Hz)	0.92
Lumen maintenance min. 8000 h (50 Hz)	0.9
Lumen maintenance min. 12000 h (50 Hz)	-
Lumen maintenance min. 16000 h (50 Hz)	-
Lumen maintenance min. 20000 h (50 Hz)	-
Lumen maintenance min. 2000 h (HF preheat)	0.97
Lumen maintenance min. 4000 h (HF preheat)	0.95
Lumen maintenance min. 6000 h (HF preheat)	0.94
Lumen maintenance min. 8000 h (HF preheat)	0.92
Lumen maintenance min. 12000 h (HF preheat)	-
Lumen maintenance min. 16000 h (HF preheat)	-
Lumen maintenance min. 20000 h (HF preheat)	-
Ambient temperature for max. lumen flux (°C)	25°
Rated luminous flux at 25°C (lm)	2936
Rated lamp efficacy (lm/W) at 100 h - 50 Hz, 25°C	-
Nominal average life (h)	10000
Survival factor 2000 h (50 Hz)	0.99
Survival factor 4000 h (50 Hz)	0.97
Survival factor 6000 h (50 Hz)	0.95
Survival factor 8000 h (50 Hz)	0.91
Survival factor 12000 h (50 Hz)	-
Survival factor 16000 h (50 Hz)	-
Survival factor 20000 h (50 Hz)	-
Survival factor 2000 h (HF)	0.99
Survival factor 4000 h (HF)	0.98


Product Image



Product line drawing (image)



Cap (image)

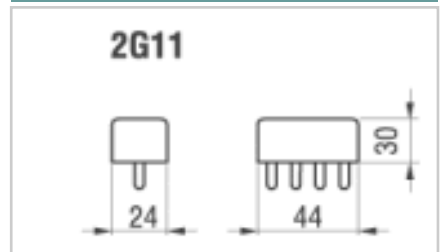

Survival factor 6000 h (HF)	0.96
Survival factor 8000 h (HF)	0.93
Survival factor 12000 h (HF)	-
Survival factor 16000 h (HF)	-
Survival factor 20000 h (HF)	-
ILCOS-code	-
Packing Quantity	10
EAN Code	5410288252384
Ordering Code	0025238

Quality seal



Conformité Européenne



Waste of Electrical and Electronic Equipment (WEEE)

Restriction of the use of certain Hazardous Substances in electrical and electronic equipment (ROHS)

Fixture rating

