


Product selected: Lynx-LE 40W/840

Product Attributes	
Item description	Lynx-LE 40W/840
Nominal wattage (W)	40
Rated Wattage (W) 50 Hz	-
Rated Wattage (W) HF	-
Bulb finish	840
Cap	2G11
Max. Overall Lamp length L [mm]	533
Diameter D [mm]	40
Mercury content per lamp (mg)	4.5
Colour rendering Index - CRI (class / %)	1B/85
Colour temperature (K)	4000
Nominal luminous flux at 25°C (lm)	-
Nominal luminous flux at 35°C (lm)	-
Lumen maintenance min. 2000 h (50 Hz)	-
Lumen maintenance min. 4000 h (50 Hz)	-
Lumen maintenance min. 6000 h (50 Hz)	-
Lumen maintenance min. 8000 h (50 Hz)	-
Lumen maintenance min. 12000 h (50 Hz)	-
Lumen maintenance min. 16000 h (50 Hz)	-
Lumen maintenance min. 20000 h (50 Hz)	-
Lumen maintenance min. 2000 h (HF preheat)	0.97
Lumen maintenance min. 4000 h (HF preheat)	0.95
Lumen maintenance min. 6000 h (HF preheat)	0.94
Lumen maintenance min. 8000 h (HF preheat)	0.92
Lumen maintenance min. 12000 h (HF preheat)	-
Lumen maintenance min. 16000 h (HF preheat)	-
Lumen maintenance min. 20000 h (HF preheat)	-
Ambient temperature for max. lumen flux (°C)	25°
Rated luminous flux at 25°C (lm)	3466
Rated lamp efficacy (lm/W) at 100 h - 50 Hz, 25°C	-
Nominal average life (h)	10000
Survival factor 2000 h (50 Hz)	-
Survival factor 4000 h (50 Hz)	-
Survival factor 6000 h (50 Hz)	-
Survival factor 8000 h (50 Hz)	-
Survival factor 12000 h (50 Hz)	-
Survival factor 16000 h (50 Hz)	-
Survival factor 20000 h (50 Hz)	-
Survival factor 2000 h (HF)	0.99
Survival factor 4000 h (HF)	0.98


## Product Image



## Product line drawing (image)



## Cap (image)

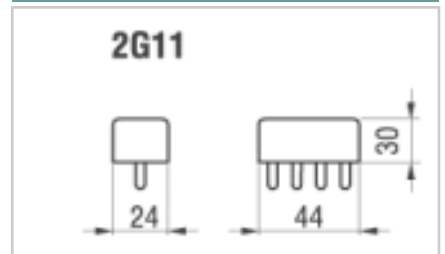

Survival factor 6000 h (HF)	0.96
Survival factor 8000 h (HF)	0.93
Survival factor 12000 h (HF)	-
Survival factor 16000 h (HF)	-
Survival factor 20000 h (HF)	-
ILCOS-code	-
Packing Quantity	10
EAN Code	5410288254623
Ordering Code	0025462

## Quality seal



Conformité Européenne



Waste of Electrical and Electronic Equipment (WEEE)

Restriction of the use of certain Hazardous Substances in electrical and electronic equipment (ROHS)

## Fixture rating

