



MASTER PL-C 4 Pin



MASTER PL-C 18W/840/4P 1CT/5X10BOX

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic HF control gear with integrated pre-heat and is provided with a plug-in/pull-out lamp base.

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- · Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information				
Cap-Base	G24q-2			
Flux measurement reference	Sphere			
Light Technical				
Color Code	840 [CCT of 4000K]			
Luminous Flux	1,200 lm			
Color Designation	Cool White (CW)			
Chromaticity Coordinate X (Nom)	0.38			
Chromaticity Coordinate Y (Nom)	0.38			
Correlated Color Temperature (Nom)	4000 K			
Luminous Efficacy (rated) (Nom)	67 lm/W			

Color rendering index (CRI)	80
Operating and Electrical	
Power Consumption	18.4 W
Lamp Current (Nom)	0.230 A
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Net Weight (Piece)	55.300 g

Datasheet, 2025, February 20 data subject to change


MASTER PL-C 4 Pin

Approval and Application	
Energy Efficiency Class	G
Mercury (Hg) Content (Max)	1.4 mg
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	19 kWh
EPREL Registration Number	423303

Full product code	871150062334870			
Order code	927907284040			
Material Nr. (12NC)	927907284040			
Numerator - Quantity Per Pack	1			
EAN/UPC - Product/Case	8711500623348			
Numerator - Packs per outer box	50			
EAN/UPC - Case	8711500715906			


Product Data	
Order product name	MASTER PL-C 18W/840/4P 1CT/5X10BOX
Full product name	MASTER PL-C 18W/840/4P 1CT/5X10BOX

Dimensional drawing



Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-C 18W/840/4P 1CT/	27.1 mm	27.1 mm	109.5 mm	128.0 mm	142.9 mm
5X10BOX					


Photometric data

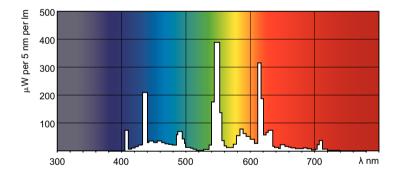


Spectral Power Distribution Colour - MASTER PL-C 18W/840/4P 1CT/5X10BOX

MASTER PL-C 4 Pin


Lifetime

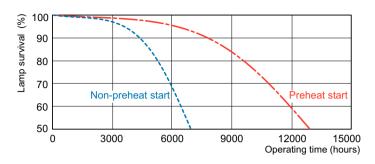



Life expectancy diagram - 3 hour cycle



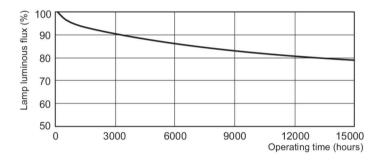

Lumen Maintenance Diagram - MASTER PL-C 18W/840/4P 1CT/5X10BOX



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.